


C-View's  
sliding windows



For more information call C-View on  
**(07) 5520 1200**  
or visit [www.c-view.com.au](http://www.c-view.com.au)

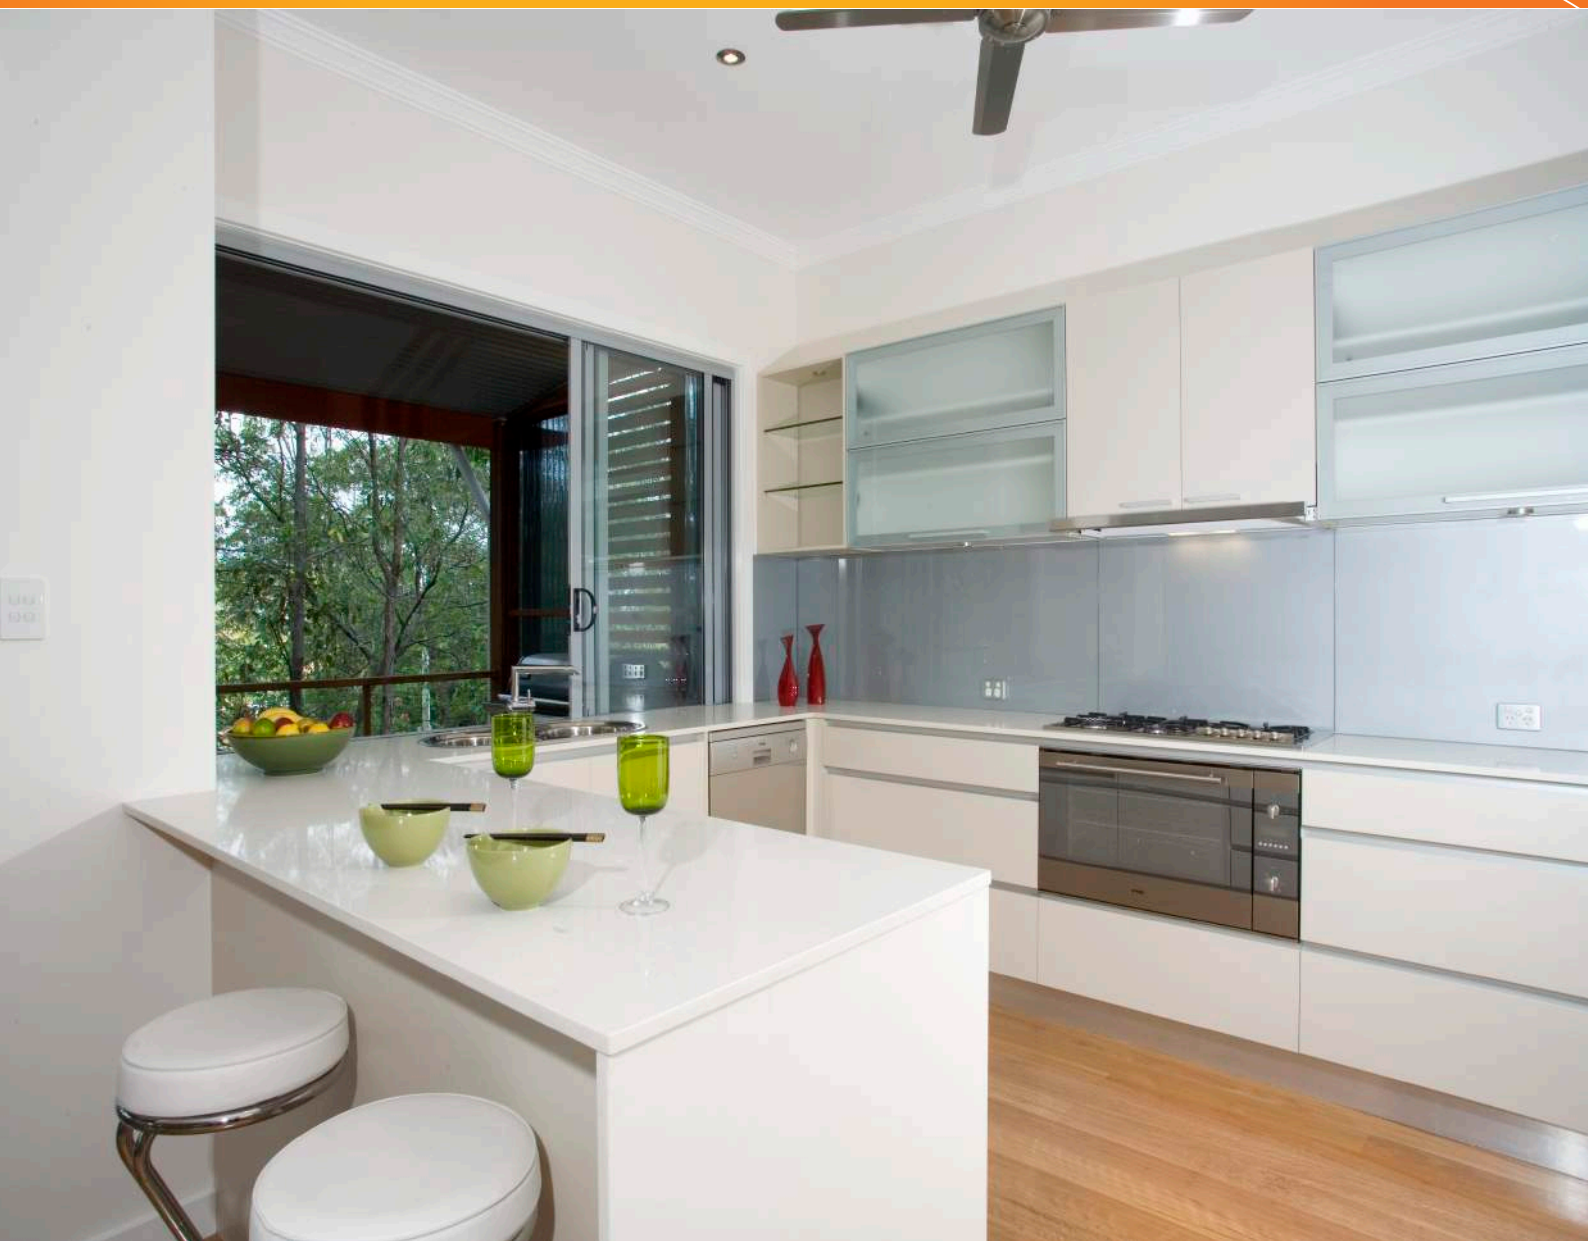

# Residential range

## Key Features and Benefits

- Functional and easy-living design
- Clean finish and appearance thanks to concealed fixings
- Ideal in servery situations between kitchen and outside entertainment areas
- Wide frame makes cleaning a breeze – most vacuum heads fit easily inside the window track
- Integrated insect, safety and security screen options
- Optional vent locks allow the window to be secured while partially open for ventilation

**Note:** Features, benefits and performance parameters are subject to local variations, climate requirements and confirmation of structural performance

## Performance Parameters

|                                      |                                       |
|--------------------------------------|---------------------------------------|
| <b>Frame size</b>                    | 52mm                                  |
| <b>Maximum window height</b>         | 1500mm (without low lites)            |
| <b>Maximum window width</b>          | 3010mm                                |
| <b>Maximum panel width</b>           | 1500mm                                |
| <b>Maximum panel weight</b>          | 24kgs                                 |
| <b>Maximum water rating</b>          | 600Pa                                 |
| <b>Maximum wind rating</b>           | 4500Pa ULS                            |
| <b>Maximum glass thickness</b>       | 6.76mm (single glazed)<br>16mm (IGUs) |
| <b>Maximum acoustic rating</b>       | Rw29                                  |
| <b>Maximum bushfire attack level</b> | BAL 40                                |



## Prestige range

### Key Features and Benefits

- Contemporary design suited for architecturally creative projects
- Clean finish and appearance thanks to concealed fixings and no visible sharp edges
- Ideal in servery situations between kitchen and outside entertainment areas
- Stylish handles are fitted with mortice lock for superior security
- High performance roller system ensures smooth sliding action at all times
- Integrated insect, safety and security screen options

### Performance Parameters

|                                      |  |
|--------------------------------------|--|
| <b>Frame sizes</b>                   | 67mm / 100mm                           |
| <b>Maximum window height</b>         | 2000mm (without low lites)             |
| <b>Maximum window width</b>          | 5400mm                                 |
| <b>Maximum panel width</b>           | 1350mm                                 |
| <b>Maximum panel weight</b>          | 100kgs                                 |
| <b>Maximum water rating</b>          | 600Pa                                  |
| <b>Maximum wind rating</b>           | 6000Pa ULS                             |
| <b>Maximum glass thickness</b>       | 12.76mm (single glazed)<br>20mm (IGUs) |
| <b>Maximum acoustic rating</b>       | Rw33                                   |
| <b>Maximum bushfire attack level</b> | BAL 40                                 |