

Sliding Windows

Region B:

| | |
|---------------|---------------------|
| N2 | Wind Classification |
| 400Pa | Serviceability |
| 1000Pa | Ultimate Strength |
| 150Pa | Water Penetration |


STANDARD SIZES

Availability of standard sizes subject to wind load and water penetration requirements

Region C: Design wind pressure is calculated to 'AS/NZS 1170.2 Structural design actions – Wind action'

| STUD | OPENING | 660mm | 960mm | 1260mm | 1560mm | 1860mm | 2160mm | 2460mm | 2760mm | 3060mm |
|--------|---------|------------|----------|-----------|-----------|-----------|-------------|-------------|-------------|-------------|
| | | FRAME SIZE | 610mm | 910mm | 1210mm | 1510mm | 1810mm | 2110mm | 2410mm | 2710mm |
| 650mm | 600mm | | | | | | | | | |
| | | SF0606 | SF0609 | SF0612 | SF0615 | SF0618 | SF0621 | SFS0624 | SFS0627 | SFS0630 |
| 950mm | 900mm | | | | | | | | | |
| | | SF0906 | SF0909 | SF0912 | SF0915 | SF0918 | SF0921 | SFS0924 | SFS0927 | SFS0930 |
| 1050mm | 1000mm | | | | | | | | | |
| | | SF1006 | SF1009 | SF1012 | SF1015 | SF1018 | SF1021 | SFS1024 | SFS1027 | SFS1030 |
| 1250mm | 1200mm | | | | | | | | | |
| | | SF1209 | SF1212 | SF1215 | SF1218 | SF1221 | SFS1224 | SFS1227 | SFS1230 | |
| 1550mm | 1500mm | | | | | | | | | |
| | | | SF1512 | SF1515 | SF1518 | SF1521 | SFS1524 | SFS1527 | SFS1530 | |
| 1850mm | 1800mm | 1200mm | | | | | | | | |
| | | 600mm | SF/F1809 | SF/F1812 | SF/FF1815 | SF/FF1818 | SF/FF1821 | SFS/FFF1824 | SFS/FFF1827 | SFS/FFF1830 |
| 2150mm | 2100mm | 1500mm | | | | | | | | |
| | | 600mm | SF/F2112 | SF/FF2115 | SF/FF2118 | SF/FF2121 | SFS/FFF2124 | SFS/FFF2127 | SFS/FFF2130 | |

- Also available in FS or FSSF configurations
- FSSF configuration is available in sizes 1810mm in width and larger

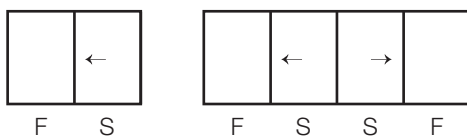

S = Sliding Panel
F = Fixed Panel (Viewed from exterior)

Note: Sliding Windows may be subject to local variation or regulatory requirements